


EE-1/EE-2 EMERGENCY LIGHT

Decorative and economical unit with "EZ" install back plate feature has modern appearance and low maintenance. It is ideal for commercial, institutional, and industrial facilities where economy, appearance, and ultimate ease on installation and maintenance are desired. Also ideal when a low profile unit needs to meet limited space requirements, and any space requiring back-up emergency lighting.

FEATURES

- Completely self-contained
- Fully automatic operation
- Compact, low profile design in neutral finish
- Universal mounting plate with "EZ" quick connect for rapid labor saving installation
- Push to test switch
- 6-volt premium grade, pure lead, calcium, maintenance-free battery with 10-year expected life
- Environmentally-coated, solid state charger
- Automatic low voltage disconnect (LVD) protects battery from deep discharge
- Universal transformer for 120 or 277 VAC operation
- Standard with two fully adjustable 5.4 watt, glare-free lighting heads
- Injection molded, V-O flame retardant, high impact, thermoplastic housing
- Charge rate/power on LED light indicator

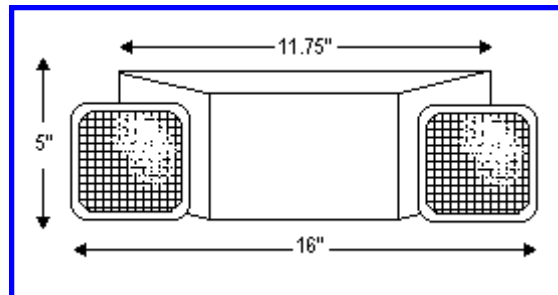

OPERATION

Whenever normal utility power fails, the internal, solid-state transfer switch automatically connects the internal battery to the two lamp heads, illuminating them for a minimum of 90 minutes.

When utility power is restored, the battery is disconnected from the lamps. Recharging the battery is initiated by a fully automatic solid-state, two-rate charger, which includes current limiting and temperature compensation to assure that the optimum recharging rate, for even a fully discharged battery, will be accomplished within 12 hours.

WARRANTY

Both the EE-1 fixture and the internal battery carry a one year warranty from the time of shipment to be free from defective material and workmanship. The battery is pro-rated for a 10-year period when operated at normal ambient temperatures.

ORDERING INFORMATION

EE-1 - 6 volt 11 watt unit with two 5.4 watt lamps.

EE-2 - 6 volt 22 watt unit with two 5.4 watt lamps. Provides 11 additional watts of remote power.

**For black units, use suffix "B"*

