

# ENDUREX-1 SELF-LUMINOUS EXIT SIGN

*Highly economical, 100% reliable, exit sign... Endurex-1 requires, no wiring, batteries, maintenance, or electrical power. It is available in 10 to 20 year life spans. It is suitable for use in hazardous atmospheres and wet locations.*

## LIGHTING

- Internally illuminated by sealed tritium gas light sources.
- 100% reliable: Requires no electrical power, wiring or batteries, and no maintenance.
- Green light output for maximum visibility in dark conditions. No external light or power is required for activation.
- Lamps guaranteed for up to 20 years of continuous operation.
- Approved for ETL for minimum visibility of 100 ft. in darkness by UL test standards.

## CONSTRUCTION

- One-piece ABS thermoplastic injection molded housing only 7/8" thick, with clear polycarbonate window.
- Sealed internal construction prevents unauthorized access to light tubes.
- Legend face is removable, allowing for quick installation or adjustment of stencil face color, with universal field-adjustable arrows.
- Standard finishes are white or black housing, with white lettering and high contrast red, green or black faceplate. Optional finishes include many custom colors.
- Suitable for use in hazardous atmospheres and wet locations.




## WARRANTY

All ENDUREX fixtures carry an unconditional warranty against failure to meet standards of specific illuminated life.

SIGN SERIES	USEFUL LIFE	# OF FACES	FACE COLOR	HOUSING COLOR	OPTIONS
END1 ENDUREX-1 SERIES	10 YEARS 15 YEARS 20 YEARS	1 2	R RED G GREEN B BLACK	W WHITE B BLACK	SEE BELOW

## OPTIONS AND ACCESSORIES

- PEN 12" Pendant Kit
- CAN Canopy Mount Kit
- REC Recess Mount
- SEC Polycarbonate security cover
- INH Cast aluminum institutional housing
- TP Tamper resistant mounting kit

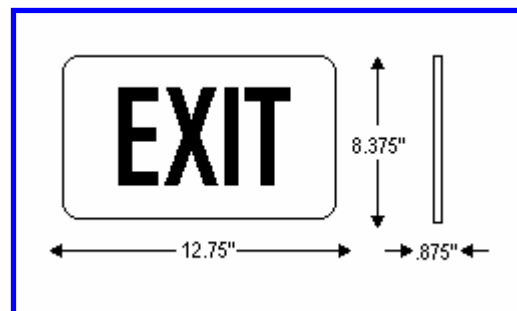

## AGENCY APPROVAL

ETL listed, per UL Standard 924 and Life Safety Code NFPA 101 (1991). Meets requirements of National Electrical Code Article 500, Class I and II conditions.

