

Premium quality sign is ideal for commercial, institutional, and industrial facilities where economy, appearance, and ultimate ease of installation and maintenance are desired. Also ideal when a low profile unit needs to meet limited space requirements, and any location requiring an exit sign.

FEATURES

- Universal transformer for 120 or 277 VAC operation, dual voltage.
- Push to test switch and charge rate/power on LED indicator light.
- Premium batteries provide 90 minutes emergency light for red and green signs.
- Remote test option available.
- UV stable, high impact, injection molded, V-O flame resistant thermoplastic housing.
- Universal mounting is standard for end, ceiling or wall application is standard. Canopy included.
- Universal pop out chevron directional arrows can be put back if desired.
- Compact low profile design in neutral finish.
- Easy quick installation.
- Bright, even illumination, with either red or green letters.
- Exceeds NFPA Life Safety Code 70 and 101 illumination requirements.
- Complies with latest standard UL924. ETL listed. Meets Chevron codes.



LED FEATURES

- Ultra bright maintenance free LED light source.
- Premium Ni-Cad battery.
- LED light source consumes only 1.03 watts.
- 95% savings compared to incandescent signs.


WARRANTY

All EXCEL fixtures are warranted to be free from manufacturing defects and workmanship for period of 10 years. The batteries are pro-rated for a 5 year period when operated at normal ambient temperatures.

SIGN SERIES	OPERATION	LETTER COLOR	# OF FACES	SIGN COLOR	OPTIONS
EXC EXCEL SERIES	AC SP 90 MINUTE BACKUP	R RED G GREEN	1 U UNIVERSAL SINGLE OR DOUBLE	WW WHITE BB BLACK	SEE BELOW

OPTIONS AND ACCESSORIES

- BZ Buzzer
- C Canopy
- DL Downlight
- DR Damp Rated
- RT Remote Test
- E Self Diagnostics
- F Flasher
- WC Wire Cage
- FBZ Flasher & Buzzer Interface
- FR Fire Alarm Flasher 24V
- 277 277 volt

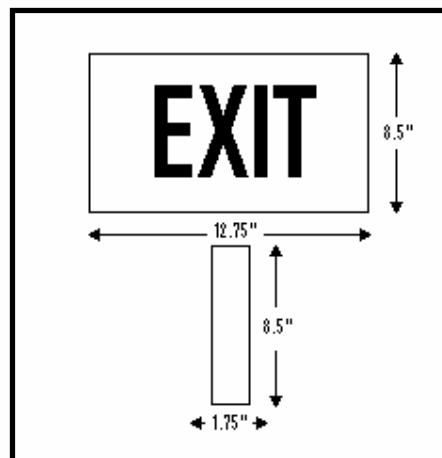

AGENCY APPROVAL

Meets the illumination requirement of NFPA Life Safety Code 101, 5-10.2.2. Certified and tested to UL924. ETL listed.

